


CAUTION:
DO NOT USE CONDENSER WINTERGUARD KIT WHEN COMPRESSOR IS ENGAGED IN DEFROST MODE.
IF OEM COMPRESSOR IS USED DURING DEFROST MODE - IT MUST BE LOCKED OUT BELOW AMBIENT TO PREVENT BEING DAMAGED BY LIQUID SLUGGING.
INLINE DIODES SHOULD BE RATED FOR AT LEAST 6 AMP 200 VOLT

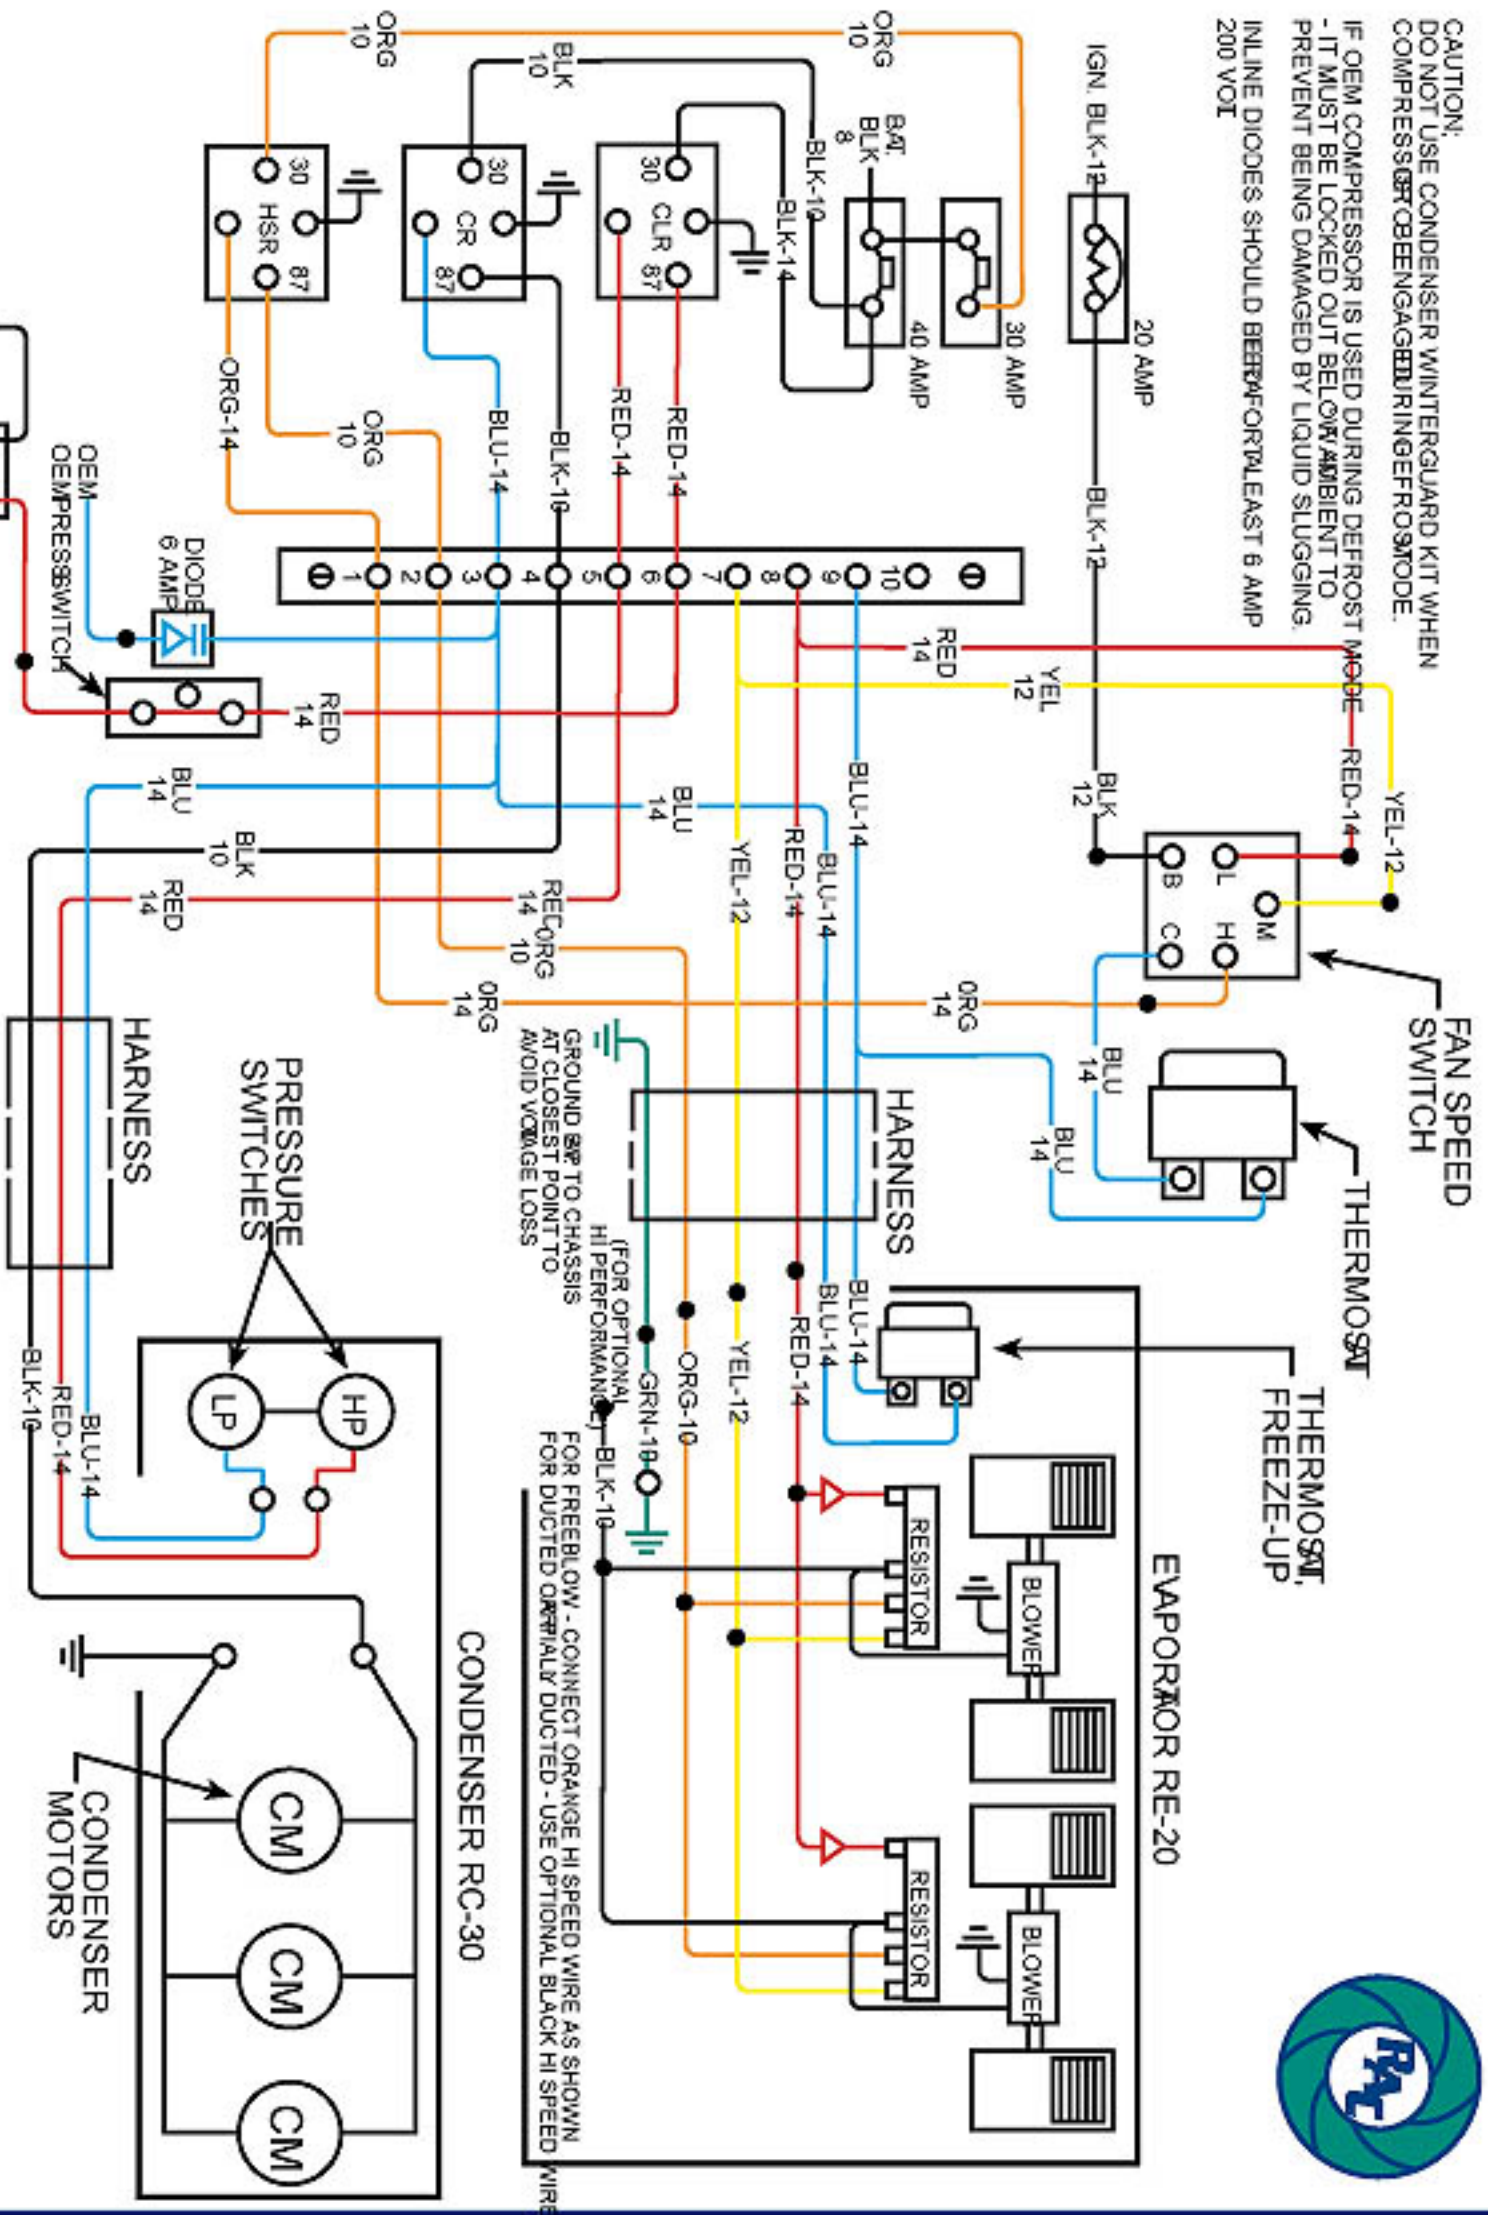

CIRCUITBREAKER IDENTIFICATION

- TYPE B - RESET WHEN EXTERNAL BUTTON IS PUSHED.
- TYPE R - RESET WHEN OVERCURRENTS CORRECTED OR REMOVED.

TOLERANCES	SCALE	DRAWN BY
DEFAULT		APPROVED BY
FUNCTIONAL	JOB	DATE
AVAILABILITY	WIRING DIAGRAM RAC-2035 TI-IN	DATE
	RAC-2035	